

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	MJ45 8P8C SMT H=5.5mm 反口	MJ88G-XX11-HXRV5

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	XSY	2015.07.08
A02		Add Bottom View, Modify PCB Yayout Sizes	XSY	2015.10.29
A03		新增电镀零锡规格	XSY	2016.02.27
A04		新增塑胶材质规格	WTF	2016.06.03

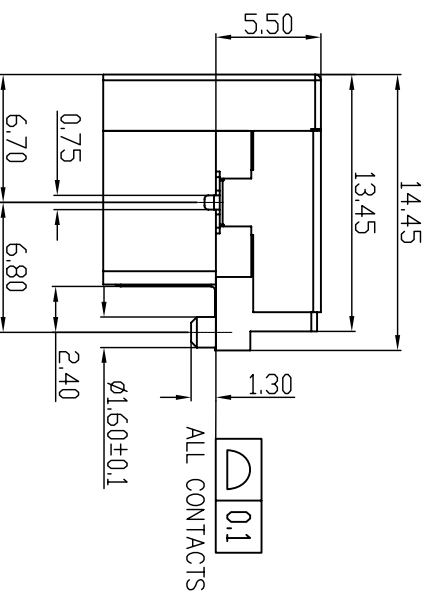
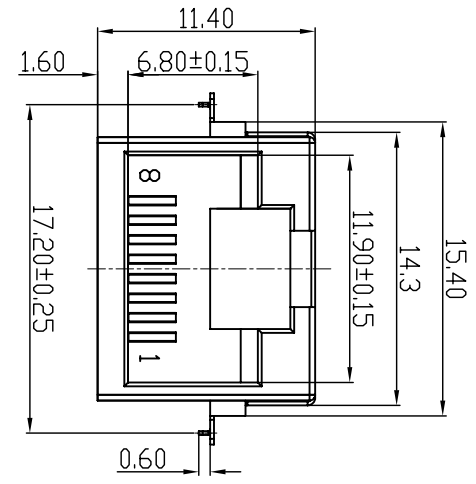
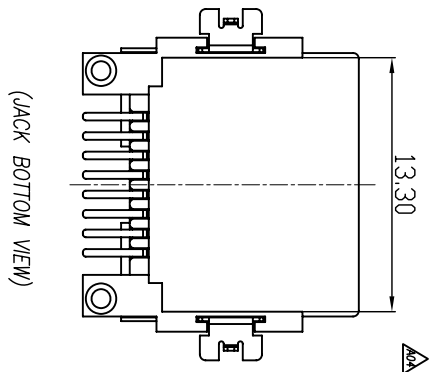
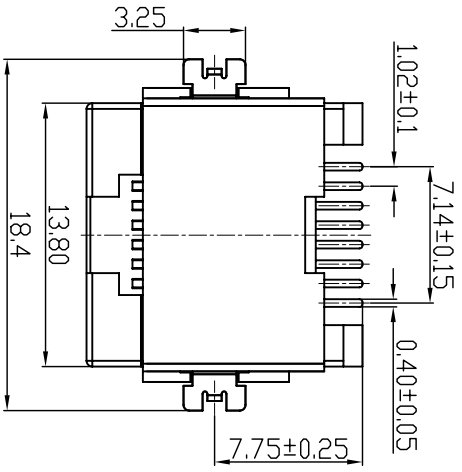


TABLE 1

X	COLOR
B	BLACK
W	WHITE

TABLE 2


X	Terminal Plating
0	Au 1u" Plating/Bright-Tin
1	Au 3u" Plating/Bright-Tin
2	Au 6u" Plating/Bright-Tin
3	Au 15u" Plating/Bright-Tin
6	Au 1u" Plating/Matte-Tin
7	Au 3u" Plating/Matte-Tin

TABLE 3

X	MATERIAL
L	LCP
9	PA9T

SPECIFICATIONS:

- Voltage: 150V AC RMS
- Current Rating: 1.5A
- Contact Resistance: 40mΩ MAX.
- Insulation Resistance: 500MΩ MIN.
- Dielectric Withstand Voltage :500V AC
- Operate Temperature: -40°C~80°C
- Durability: 750 Mating Cycles MIN.

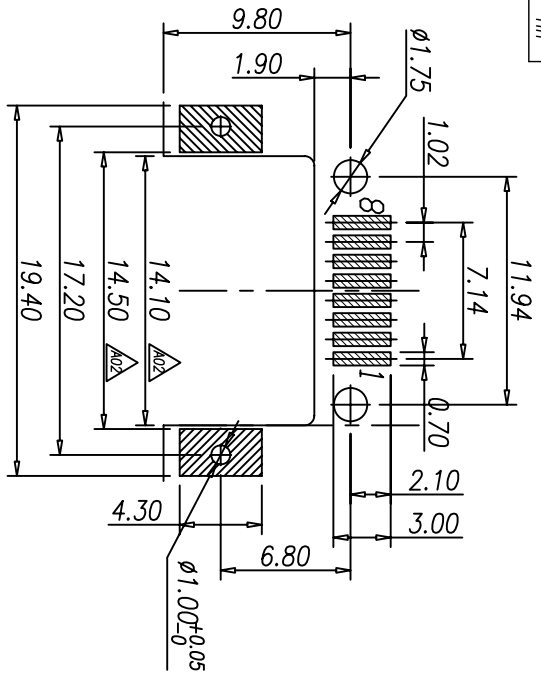


Recommend PCB Layout  
Jack Top View  
Tolerance: ±0.05mm

C	SHELL	1	BRASS T=0.2mm	Ni PALLING	
b	TERMINAL	8	PHOSPHOR BRONZE T=0.3mm	Au/Tin PALLING	
a	HOUSING	1	SEE TABLE 2	SEE TABLE 1	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
XX :±0.3	XX :±1°
XXX :±0.2	


**东莞市合陵电子有限公司**  
 Dongguan Heling Electronic Co.,LTD  
 Connector  
 SCALE:1/1 UNIT: mm  
 SIZE: A3 PAGE:1 OF 1 REV:A04 DWG.NO: WI-061-146  
 APPROVED BY: XSY CHECKED BY: XSY PREPARED BY: XSY  
 DICK XSY  
**CUSTOMER COPY**